




MULTI-ROOM INNOVATIVE SOLUTIONS  
HIGH STATIC

Compact and powerful, the high static slim duct offers the ultimate in flexibility and discretion. Concealed above suspended ceilings or within open closet spaces to deliver conditioned air via extended ducting and suitable ceiling or wall grilles.

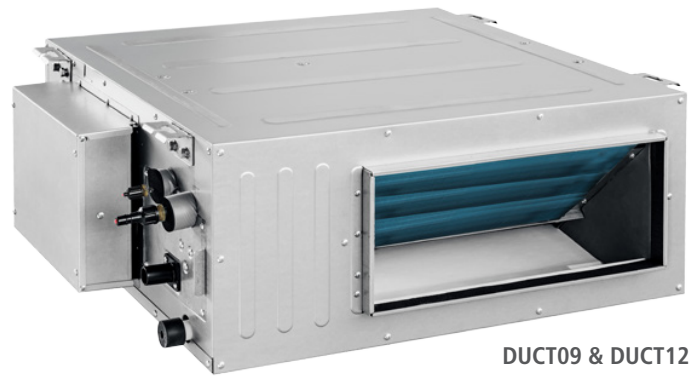

DUCT09 & DUCT12



DUCT18 & DUCT24

## Features and Benefits

- ▶ High Static Pressure Capability (selectable up to .8" Esp)
- ▶ Slim Line Construction 11.8" High
- ▶ Outside Air Capability
- ▶ Unique IAQ Filter Available
- ▶ Internal Condensate Pump
- ▶ Sentry Float Switch
- ▶ IR Remote and XK19 Wired Controllers included
- ▶ Gree I-Feel Mode

| MODELS                             |       | DUCT09HP230V1BD    | DUCT12HP230V1BD    | DUCT18HP230V1BD    | DUCT24HP230V1BD    |
|------------------------------------|-------|--------------------|--------------------|--------------------|--------------------|
| System Type                        |       | Heat Pump          |                    |                    |                    |
| SYSTEM PERFORMANCE                 |       |                    |                    |                    |                    |
| Cooling Capacity*                  | Btu/h | 9,000              | 12,000             | 18,000             | 24,000             |
| Heating Capacity*                  | Btu/h | 9,500              | 13,000             | 19,000             | 27,000             |
| Airflow (Min-Max)                  | CFM   | 188/324            | 212/353            | 288/589            | 406/736            |
| Internal Static Pressure (STD-MAX) | InWg  | .24/.6             | .24/.6             | .36/.8             | .36/.8             |
| Sound Pressure Level (Min-Max)     | dB(A) | 25/36              | 26/38              | 26/39              | 28/42              |
| Dehumidification                   | pt/hr | 1.7                | 3.0                | 3.8                | 5.3                |
| Unit Dimensions (W x D x H)        | in    | 32.7 x 29.7 x 11.8 | 32.7 x 29.7 x 11.8 | 44.5 x 29.7 x 11.8 | 44.5 x 29.7 x 11.8 |
| Package Dimensions (W x D x H)     | in    | 35.3 x 31.8 x 13.6 | 35.3 x 31.8 x 13.6 | 47.5 x 32 x 14.2   | 47.5 x 32 x 14.2   |
| Weight (Net/Gross)                 | lbs   | 70/83.8            | 70/83.8            | 92.6/107           | 92.6/107           |
| INSTALLATION                       |       |                    |                    |                    |                    |
| Line Set Size (Liquid - Gas)       | in    | 1/4 - 3/8          | 1/4 - 1/2          | 3/8 - 5/8          | 3/8 - 5/8          |
| Limited Warranty                   |       | 5 Years on Parts   |                    |                    |                    |

\* Min / Max capacities will be determined by the Outdoor unit's capacities if diversity factors are not applicable. Capacities for each zone will be 10% higher Min capacity and 10% lower Max capacity than the 1 to 1 system capacities listed in the brochure.